

# MAGNUS™



## Step-Up Transformer

When power systems are put into operation or when faults occur, it becomes necessary to check the instrument transformers to make sure that they are providing test instruments and protective relay equipment with the correct outputs.

MAGNUS™ permits you to prepare excitation curves for instrument transformers quickly and easily.

MAGNUS™ is also used to demagnetize current transformer cores and to conduct turn-ratio tests on voltage transformers. Even though it weighs only 16 kg (35 lbs), it provides 1 A at 2.2 kV. Two-hand control enhances personal safety.

As standard, MAGNUS™ is delivered with a special high-voltage cable and a robust transport case.


## Application example

### IMPORTANT!

Read the User's manual before using the instrument.

#### Prepare an excitation curve

1. Connect MAGNUS to the secondary side of the current transformer being tested and also to an ammeter and voltmeter.
2. Increase the voltage with the dial.
3. Jot down the values of U (voltage) and I (current).
4. Repeat steps 2 and 3 until the current (I) rises sharply without any significant rise in voltage (U).
5. Conclude the test by reducing U (voltage) slowly to zero, thereby providing demagnetization.

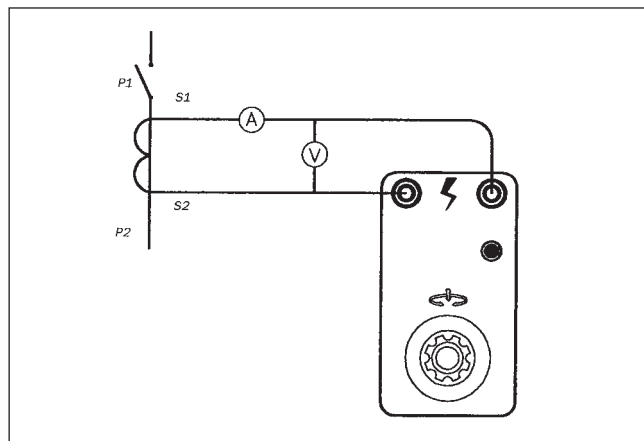

#### Measuring outputs

Voltage	100/1, (max load of 1 M $\Omega$ )
Inaccuracy	$\pm 1,5\%$
Current	10/1
Inaccuracy	$\pm 1,5\%$ at 2 A output current $\pm 3\%$ at 0,5 A output current

#### Outputs

##### Voltage outputs, AC (CAT I)

230 V mains voltage			
(I) High voltage output <sup>1)</sup>		0 – 2200 V AC	
(II) Variable transformer, not isolated from mains <sup>1)</sup>		0 – 250 V AC	
Voltage	Current	Max. load time	Rest time
2200 V AC	1 A	30 s <sup>2)</sup>	10 minutes <sup>2)</sup>
250 V AC	6 A	Continuous	–
115 V mains voltage			
(I) High voltage output <sup>1)</sup>		0 – 2000 V AC	
(II) Variable transformer, not isolated from mains <sup>1)</sup>		0 – 110 V AC	
Voltage	Current	Max. load time	Rest time
2000 V AC	1 A	30 s <sup>2)</sup>	10 minutes <sup>2)</sup>
110 V AC	10 A	Continuous	–

<sup>1)</sup> The outputs I and II must not be loaded at the same time.

<sup>2)</sup> The load time and rest time for the high voltage output is calculated at the maximum output voltage and current. During an excitation test the voltage and current is only at their maximum level at the end of the test.

## Specifications MAGNUS

Specifications are valid at nominal input voltage and an ambient temperature of +25°C, (77°F). Specifications are subject to change without notice.

#### Environment

Application field	The instrument is intended for use in high-voltage substations and industrial environments.
Temperature	
Operating	0°C to +50°C (32°F to +122°F)
Storage & transport	-40°C to +70°C (-40°F to +158°F)
Humidity	5% – 95% RH, non-condensing

#### CE-marking

LVD	Low Voltage Directive 73/23/ EEC am. by 93/68/EEC
EMC	EMC Directive 89/336/EEC am. by 91/263/EEC, 92/31/EEC and 93/68/EEC

#### General

Mains voltage	115/230 V AC, 50/60 Hz
Power consumption (max)	2300 VA
Protection	Thermal cut-outs
Dimensions	
Instrument	356 x 203 x 241 mm (14" x 8" x 9,5")
Transport case	610 x 290 x 360 mm (24" x 11,4" x 14,2")
Weight	16.3 kg (35,9 lbs) 26.7 kg (58,9 lbs) with accessories and transport case
High voltage cables	2 x 5 m (16.4 ft) / 1,5 mm <sup>2</sup> , 15 kV

## Ordering information

### Magnus

Complete with:  
Cable set GA-00090  
Transport case GD-00182  
115 V Mains voltage  
230 V Mains voltage

### Art.No.

**BT-11190**

**BT-12390**



Cable set GA-00090